



INVESTOR IN PEOPLE

REC'D 01 APR 2004	
WIPO	PCT

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.


I also certify that the application is now proceeding in the name as identified herein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

BEST AVAILABLE COPY

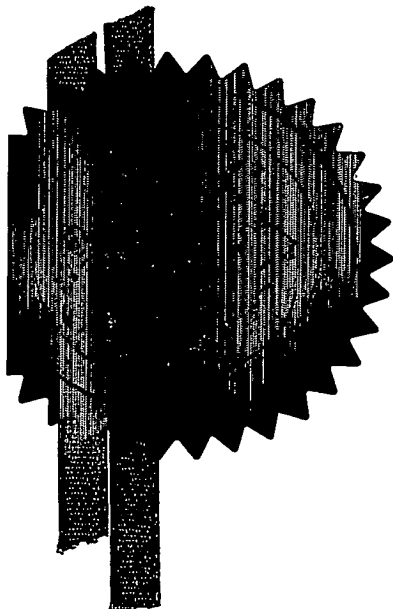

Signed

*Stephen Hordley*

Dated 25 March 2004

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)



INVESTOR IN PEOPLE

GB 0306536.4

By virtue of a direction given under Section 30 of the Patents Act 1977, the application is proceeding in the name of

MARCONI UK INTELLECTUAL PROPERTY LTD,  
PO Box 53,  
New Century Park,  
Coventry,  
CV3 1HJ,  
United Kingdom

Incorporated in the United Kingdom,

[ADP No. 08660763001]

THE PATENT OFFICE

The Patent Office

21 MAR 2003

NEWPORT

21MAR03 E794220-1 D00314  
P01/7700 0.00-0306536.4

The Patent Office  
Cardiff Road  
Newport  
Gwent NP10 8QQ

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference P/63663.GBA

2. Patent application number  
(The Patent Office will fill in this part) 0306536.4 21 MAR 2003

3. Full name, address and postcode of the or of each applicant (underline all surnames) Marconi Communications Limited  
P O Box 53  
New Century Park  
Coventry CV3 1HF

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

ENGLAND

SECTION 30 (1977 ACT) APPLICATION FILED 17/6/03

7894538001

4. Title of the invention "Paths in Telecommunications Networks"

5. Name of your agent (if you have one) Rosi Armstrong

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Marconi Intellectual Property  
Marrable House  
The Vineyards  
Great Baddow  
Chelmsford  
Essex CM2 7QS

Patents ADP number (if you know it)

40527004

7873300002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country	Priority application number (if you know it)	Date of filing (day / month / year)
---------	--	-------------------------------------

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application	Date of filing (day / month / year)
-------------------------------	-------------------------------------

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

YES

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form	0
Description	12
Claim(s)	5
Abstract	1
Drawing(s)	1

10. If you are also filing any of the following, state how many against each item.

Priority documents	0
Translations of priority documents	0
Statement of inventorship and right to grant of a patent (Patents Form 7/77)	0
Request for preliminary examination and search (Patents Form 9/77)	1
Request for substantive examination (Patents Form 10/77)	0
Any other documents (please specify)	

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

Rosi Armstrong

19 March 2003

ROSI ARMSTRONG

12. Name and daytime telephone number of person to contact in the United Kingdom

Rosi Armstrong  
024 76 56 3618

#### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

#### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- ~~If you have answered 'Yes' Patents Form 7/77 will need to be filed.~~
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

PATHS IN TELECOMMUNICATIONS NETWORKS

This invention relates to paths in telecommunications networks, and particularly to permanent virtual paths (PVPs) in such a network.

In known telecommunications networks, traffic streams are routed around the network using switches. In some networks, each switch is dynamic, i.e. when a switch receives signalling associated with a traffic stream it interrogates the signalling to determine the intended destination of the traffic stream, and sets up an appropriate path for the traffic stream. This allows efficient use of the network resources such as bandwidth, which is only consumed when required. However, the processing of the signalling and the establishment of the path puts a considerable work load on each switch, and routing of traffic streams through such a network can be slower than desired.

An alternative to the above type of network, is to establish paths, such as PVPs, between all possible traffic stream sources and destinations. The paths for all traffic streams will be permanently set up in each switch of such a network, and when a switch receives a traffic stream it does not have to work to create an appropriate path, as the path has already been established. This decreases the processing necessary in each switch, and increases the speed of routing traffic streams through the network. However, as the number of sources and destinations in such a network grows, the number of required paths also grows, and can become difficult to manage. In addition, in each switch, each physical port is shared by many paths, and the aggregate bandwidth of the individual paths must be less than or equal to the port bandwidth, for e.g. constant

bit rate (CBR) traffic streams. When the aggregate bandwidth of the individual paths is equal to the port bandwidth, if it is desired to add more paths to the port, then the bandwidth available for each path must be reduced. This available bandwidth may become unacceptably small.

5

It is desirable to be able to use the advantage of paths such as PVPs in a telecommunications network, without the associated disadvantages, for example the number of such paths becoming unmanageable.

10 According to the present invention there is provided a telecommunications network comprising

a plurality of network elements, switching means, and a traffic stream controller, wherein, for each network element,

there is provided a set of outgoing paths from the network element to the switching  
15 means, one outgoing path carrying traffic streams for each of the network elements, and an incoming path carrying traffic streams from the switching means to the network element,

to route traffic streams from each of the network elements to the network element, the switching means merges each outgoing path carrying traffic streams for the network  
20 element onto the incoming path of the network element, and routing of the traffic streams to the network element is controlled by the network element using the traffic stream controller.

---

The telecommunications network thus comprises a merged mesh of paths, which fully interconnects all of the network elements. Paths within the switching means may be permanently set up. This reduces the work load of the switching means, and increases the speed of routing traffic streams through the network. The number of paths in the telecommunications network required to create such a fully interconnected mesh is reduced by merging individual outgoing paths onto a single incoming path. Thus larger networks may be built, which can be more efficient and less difficult to manage.

Each outgoing path may comprise a permanent virtual path (PVP), such as a constant bit rate (CBR) PVP. Each incoming path may comprise a permanent virtual path (PVP), such as a CBR PVP. The or each or some of the network elements may comprise a gateway network element.

For each network element, control of routing of the traffic streams to the network element may comprise control of usage of the incoming path bandwidth of the network element. Each network element may control usage of the incoming path bandwidth by using information received from the traffic stream controller. The information received from the traffic stream controller may comprise information concerning each of the traffic streams which the network element is to receive. The information received from the traffic stream controller may comprise information concerning the bandwidth of each of the traffic streams which the network element is to receive. Each network element may use the information received from the traffic stream controller to calculate the aggregate bandwidth of any traffic streams being carried on the incoming path of the network element and each of the traffic streams which it is to receive. Each network

element may check that the aggregate bandwidth does not exceed the incoming path bandwidth of the network element. Each network element may reject one or more of the traffic streams which it is to receive, if the aggregate bandwidth exceeds the incoming path bandwidth. Each network element may control usage of the incoming path bandwidth by using a bandwidth control algorithm, which may be provided on each network element. Each network element may control usage of the incoming path bandwidth to maintain a part of the bandwidth for one or more types of traffic streams, e.g. telephone calls to emergency services.

10 For each network element, the incoming path may come from an egress port of the switching means. For each network element, the incoming path bandwidth may be less than or equal to the bandwidth of an egress port of the switching means from which the incoming path comes. For each network element, each outgoing path may have a bandwidth less than or equal to the bandwidth of the network element incoming path onto which the outgoing path is merged. Thus each individual outgoing path can deliver up to the maximum bandwidth capacity of the network element incoming path onto which the outgoing path is merged.

20 For each network element, control of routing of the traffic streams to the network element from each of the network elements may comprise the network elements exchanging network element identities via the traffic stream controller. The network element identities may determine the paths to be used for the traffic streams.

---



For each network element, control of routing of the traffic streams to the network element may comprise setting up a virtual connection (VC) for each traffic stream, within an outgoing path carrying the traffic stream and the incoming path of the network element. This may be achieved by using a VC allocation algorithm, which  
5 may be provided on each network element, for example on a destination function of the network element. Setting up each VC may comprise allocating a VC identifier (VCI) to each VC. Allocating a VCI to each VC may comprise the network element choosing a VCI for each VC. Allocating a VCI to each VC may comprise the network element communicating a chosen VCI to each of the network elements of the  
10 telecommunications network. Communicating a chosen VCI may be achieved via the traffic stream controller. For example, for each network element setting up a VC for a traffic stream may comprise the following steps : the traffic stream controller informs the network element that a traffic stream is to be sent to it from a source network element, the network element chooses a VCI for a VC for the traffic stream, the network  
15 element communicates the chosen VCI to the traffic stream controller, the traffic stream controller communicates the chosen VCI to the source network element, and the source network element assigns the traffic stream to a VC having the VCI. Each network element may therefore control the VCIs of the VCs for the traffic streams it receives. This ensures that each traffic stream is received by the network element on a unique  
20 VC, and avoids receiving two different traffic streams on the same VC, which would otherwise result in mixing of these traffic streams.

The telecommunications network may provide a constant bit rate (CBR) service. The telecommunications network may provide a CBR service with symmetric dynamic

connections, or asymmetric dynamic connections. The telecommunications network may provide a 64kbit telephony CBR service. The telecommunications network may route CBR traffic streams. The quality of service (QOS) for CBR traffic streams may be maintained when all of the incoming path bandwidth of a network element is being  
5 used by the CBR traffic streams, by the network element refusing to accept any further CBR traffic streams.

The switching means may comprise one or more switches of the telecommunications network, for example, an edge switch, or a core switch, or a combination of one or more  
10 edge switches and one or more core switches. For each network element, the outgoing paths carrying traffic streams for the network element may be merged in one or more stages. For each network element, the outgoing paths carrying traffic streams for the network element may be merged in one or more stages using one or more switches of the switching means. For example, for each network element, a first group of outgoing  
15 paths carrying traffic streams for the network element may be merged in a first stage, a second group of outgoing paths comprising the remaining outgoing paths carrying traffic streams for the network element may be merged in a second stage, and the first and second groups of outgoing paths may be merged in a third stage onto the incoming path of the network element. The first group of outgoing paths may be merged using a  
20 first switch of the switching means, e.g. an edge switch, the second group of outgoing paths may be merged using a second switch of the switching means, e.g. an edge switch, and the first and second groups may be merged using a third switch of the switching means, e.g. a core switch, connected between the first and second switches.

---

For each network element, each outgoing path and the incoming path may be set up when the network element is installed in the telecommunications network. For each network element, the merging of outgoing paths carrying traffic streams for the network element onto the incoming path of the network element may be set up when the switching means is installed in the telecommunications network. It is then possible that no further configuration management of the network elements or the switching means will be required.

The telecommunications network may be split into a plurality of zones. Each zone may comprise a plurality of network elements, switching means and a traffic stream controller, as described above. Each zone may be interconnected to other zones using one or more trunking routes. Each zone may use a traffic stream controller to interwork with other zones to set up traffic streams between zones using the trunking routes. This will allow larger telecommunications networks to be created.

15

The telecommunications network may comprise an asynchronous transfer mode (ATM) telecommunications network.

The switching means may be provided in an edge switch of the telecommunications network. The edge switch may be connected via a single ingress port to an egress port of a core switch of the telecommunications network. Each incoming path to a network element may be connected via the ingress port of the edge switch. The bandwidth of the ingress port of the edge switch may be split between each of the incoming paths

20

connected to that port. The edge switch will connect each incoming path to an egress port that is connected to the relevant network element.

When supporting a CBR service, each of the outgoing paths from a network element  
5 needs to be able to carry the full outgoing bandwidth of the network element, as it is possible for all traffic streams from an originating network element to be connected to a single destination network element. As there are several outgoing paths per network element, one for each destination network element, the total required outgoing bandwidth is the summation of all the outgoing path bandwidths from the network  
10 element. However, this is a worst case scenario because if all of the outgoing traffic streams are on one outgoing path, all of the other outgoing paths from the originating network element will be empty. Hence, to optimise bandwidth utilisation, the outgoing paths are treated as a group of paths, and the outgoing bandwidth from the network element is booked for the group as an aggregated bandwidth. In this case, the  
15 aggregated bandwidth for the group of paths will be equal to the maximum outgoing bandwidth of the network element. Any outgoing path within the group is allowed to use up to this maximum bandwidth, and because the network element monitors the set-up of all calls and allocation of VCs within the group of outgoing paths, it can ensure that the total bandwidth of the group never exceeds the maximum. The principle is also  
20 applied to the link between the edge switch egress port and the core switch ingress port, where the outgoing paths are merged. At this point, the aggregated bandwidth of the group of outgoing paths is equal to the summation of the maximum outgoing bandwidth of the network elements that are connected to the outgoing paths.

---

It is possible to refine the above outgoing bandwidth allocation configuration rule if the network elements are sub-equipped and the call set-up algorithm is configured to use a corresponding reduced outgoing bandwidths. Then the aggregated bandwidth of the group of outgoing paths can be configured as the sum of the individual configured network element bandwidths rather than the maximum network element bandwidth, thus optimising the use of bandwidth further but increasing the complexity of the management task.

Allocating a fixed bandwidth to the group allows other services with different quality of service (QOS) to set up connections on the switches, and utilise any remaining bandwidth without affecting the QOS of the group which behaves as a CBR path.

An embodiment of the invention will now be described, by way of example only, with reference to the drawing which is a schematic representation of a telecommunications network according to the invention.

The telecommunications network 1 of the drawing is an ATM telecommunications network, and comprises four gateway network elements 2, 3, 4, 5, switching means comprising a first ATM edge switch 6, a second ATM edge switch 7, and an ATM core switch 8, and a traffic stream controller 9. Each gateway network element has four uni-directional outgoing paths 10 (one outgoing path carrying traffic streams for each of the other gateway network elements and one outgoing path carrying traffic streams back to the network element), and a single uni-directional incoming path 11. The outgoing paths of gateway network elements 2, 3 go to the first ATM edge switch 6, and the

outgoing paths of gateway network elements 4, 5 go to the second ATM edge switch 7. Similarly, the incoming paths of gateway network elements 2, 3 come from the first ATM edge switch 6, and the incoming paths of gateway network elements 4, 5 come from the second ATM edge switch 7. The first and second ATM edge switches 6, 7 are  
5 connected to the ATM core switch 8. Each gateway network element is connected to the traffic stream controller 9.

The operation of the telecommunications network with regard to routing traffic streams to each gateway network element is similar, and the routing of traffic streams to only  
10 gateway network element 2 will therefore be described in detail.

Each of the gateway network elements 2, 3, 4, 5 has a outgoing path 12 carrying traffic streams for the gateway network element 2. These outgoing paths are merged by the switches of the switching means in the following manner. The outgoing path 12 of  
15 gateway network element 2 and the outgoing path 12 of gateway network element 3 are merged onto an egress port 13 of ATM edge switch 6, which is connected to a merged path 14. Similarly, the outgoing path 12 of gateway network element 4 and the outgoing path 12 of gateway network element 5 are merged onto an egress port 15 of ATM edge switch 7, which is connected to a merged path 16. The merged path 14 is  
20 connected to an ingress port 17 of ATM core switch 8, and the merged path 16 is connected to an ingress port 18 of ATM core switch 8. The ATM core switch 8 merges the two merged paths 14, 16 onto an egress port 19 of this switch, which is connected to the incoming path 11 of the gateway network element 2. Thus each of the outgoing

---

paths carrying traffic streams for the gateway network element 2 are merged by the switches onto the incoming path of this gateway network element.

Routing of the traffic streams to a gateway network element is controlled by the gateway network element using the traffic stream controller 9. This comprises controlling usage of the incoming path bandwidth of the gateway network element. This is achieved as follows. Each gateway network element receives information from the traffic stream controller 9 comprising the bandwidth of the traffic signals which the gateway network element is to receive. Each gateway network element then uses a bandwidth control algorithm to calculate the aggregate bandwidth of any traffic streams being carried by the incoming path of the gateway network element and each of the traffic streams which it is to receive. Each gateway network element checks that this aggregate bandwidth does not exceed the incoming path bandwidth, and may reject one or more of the traffic streams which it is to receive, if the aggregate bandwidth exceeds the incoming path bandwidth.

Control of routing of the traffic streams to a gateway network element also comprises setting up a VC for each of the traffic streams within an outgoing path carrying the traffic stream and the incoming path of the gateway network element. Setting up a VC for each traffic stream for the gateway network element 2 comprise the following steps. The traffic stream controller 9 informs the gateway network element 2 that a traffic stream from a gateway network element, e.g. 5, is to be sent to it. The gateway network element 2 chooses a VCI for a VC for the traffic stream, and communicates the chosen VCI to the traffic stream controller 9. The traffic stream controller 9 communicates the

VCI to gateway network element 5, and this gateway network element assigns its traffic stream to a VC having the chosen VCI communicated to it. The gateway network element 2 can therefore control the VCIs for the VCs for the traffic streams it receives, and can avoid receiving two different traffic streams on the same VC.



CLAIMS

1. A telecommunications network comprising  
a plurality of network elements, switching means, and a traffic stream controller,  
wherein, for each network element,  
there is provided a set of outgoing paths from the network element to the  
switching means, one outgoing path carrying traffic streams for each of the  
network elements, and an incoming path carrying traffic streams from the  
switching means to the network element,  
to route traffic streams from each of the network elements to the network  
element, the switching means merges each outgoing path carrying traffic streams  
for the network element onto the incoming path of the network element, and  
routing of the traffic streams to the network element is controlled by the network  
element using the traffic stream controller.
2. A telecommunications network according to claim 1, in which each outgoing  
path comprises a permanent virtual path (PVP).
3. A telecommunications network according to claim 1 or claim 2, in which each  
incoming path comprises a permanent virtual path (PVP).
4. A telecommunications network according to any preceding claim, in which for  
each network element control of routing of the traffic streams to the network  
element comprises control of usage of the incoming path bandwidth of the  
network element.

5. A telecommunications network according to claim 4, in which each network element controls usage of the incoming path bandwidth by using information received from the traffic stream controller.
  6. A telecommunications network according to claim 5, in which the information received from the traffic stream controller comprises information concerning each of the traffic streams which the network element is to receive.
  7. A telecommunications network according to claim 5 or claim 6, in which the information received from the traffic stream controller comprises information concerning the bandwidth of each of the traffic streams which the network element is to receive.
  8. A telecommunications network according to claim 6 or claim 7, in which each network element uses the information received from the traffic stream controller to calculate the aggregate bandwidth of any traffic streams being carried on the incoming path of the network element and each of the traffic streams which it is to receive.
  9. A telecommunications network according to claim 8, in which each network element checks that the aggregate bandwidth does not exceed the incoming path bandwidth of the network element.
-

10. A telecommunications network according to claim 9; in which each network element rejects one or more of the traffic streams which it is to receive, if the aggregate bandwidth exceeds the incoming path bandwidth.
11. A telecommunications network according to any preceding claim, in which for each network element the incoming path bandwidth is less than or equal to the bandwidth of an egress port of the switching means from which the incoming path comes.
12. A telecommunications network according to any preceding claim, in which for each network element each outgoing path has a bandwidth less than or equal to the bandwidth of the network element incoming path onto which the outgoing path is merged.
13. A telecommunications network according to any preceding claim, in which for each network element control of routing of the traffic streams to the network element from each of the network elements comprises the network elements exchanging network element identities via the traffic stream controller.
14. A telecommunications network according to any preceding claim, in which for each network element control of routing of the traffic streams to the network element comprises setting up a virtual connection (VC) for each traffic stream, within an outgoing path carrying the traffic stream and the incoming path of the network element.

15. A telecommunications network according to claim 14, in which setting up each VC comprises allocating a VC identifier (VCI) to each VC.
  16. A telecommunications network according to claim 15, in which allocating a VCI to each VC comprises the network element choosing a VCI for each VC.
  17. A telecommunications network according to claim 16, in which allocating a VCI to each VC comprises the network element communicating a chosen VCI to each of the network elements of the telecommunications network.
  18. A telecommunications network according to claim 17, in which communicating a chosen VCI is achieved via the traffic stream controller.
  19. A telecommunications network according to any of claims 14 to 18, in which for each network element setting up a VC for a traffic stream comprises the following steps : the traffic stream controller informs the network element that a traffic stream is to be sent to it from a source network element, the network element chooses a VCI for a VC for the traffic stream, the network element communicates the chosen VCI to the traffic stream controller, the traffic stream controller communicates the chosen VCI to the source network element, and the source network element assigns the traffic stream to a VC having the VCI.
  20. A telecommunications network according to any preceding claim, in which the telecommunications network routes CBR traffic streams.
-


21. A telecommunications network according to any preceding claim, in which the switching means comprises one or more switches of the telecommunications network.
22. A telecommunications network according to any preceding claim, in which for each network element the outgoing paths carrying traffic streams for the network element are merged in one or more stages using one or more switches of the switching means.
23. A telecommunications network substantially as described herein with reference to the accompanying drawing.

ABSTRACTPATHS IN TELECOMMUNICATIONS NETWORKS


A telecommunications network (1) is provided, comprising a plurality of network elements (2, 3, 4, 5), switching means (6, 7, 8), and a traffic stream controller (9), wherein, for each network element, there is provided a set of outgoing paths (10) from the network element to the switching means, one outgoing path carrying traffic streams for each of the network elements, and an incoming path (11) carrying traffic streams from the switching means to the network element, the switching means merges each outgoing path carrying traffic streams for the network element onto the incoming path of the network element, to route traffic streams from each of the network elements to the network element, and routing of the traffic streams to the network element is controlled by the network element using the traffic stream controller.

The telecommunications network thus comprises a merged mesh of paths, which fully interconnects all of the network elements. Each outgoing path and incoming path may comprise a permanent virtual path (PVP). For each network element, control of routing of the traffic streams to the network element may comprise control of usage of the incoming path bandwidth of the network element.

---

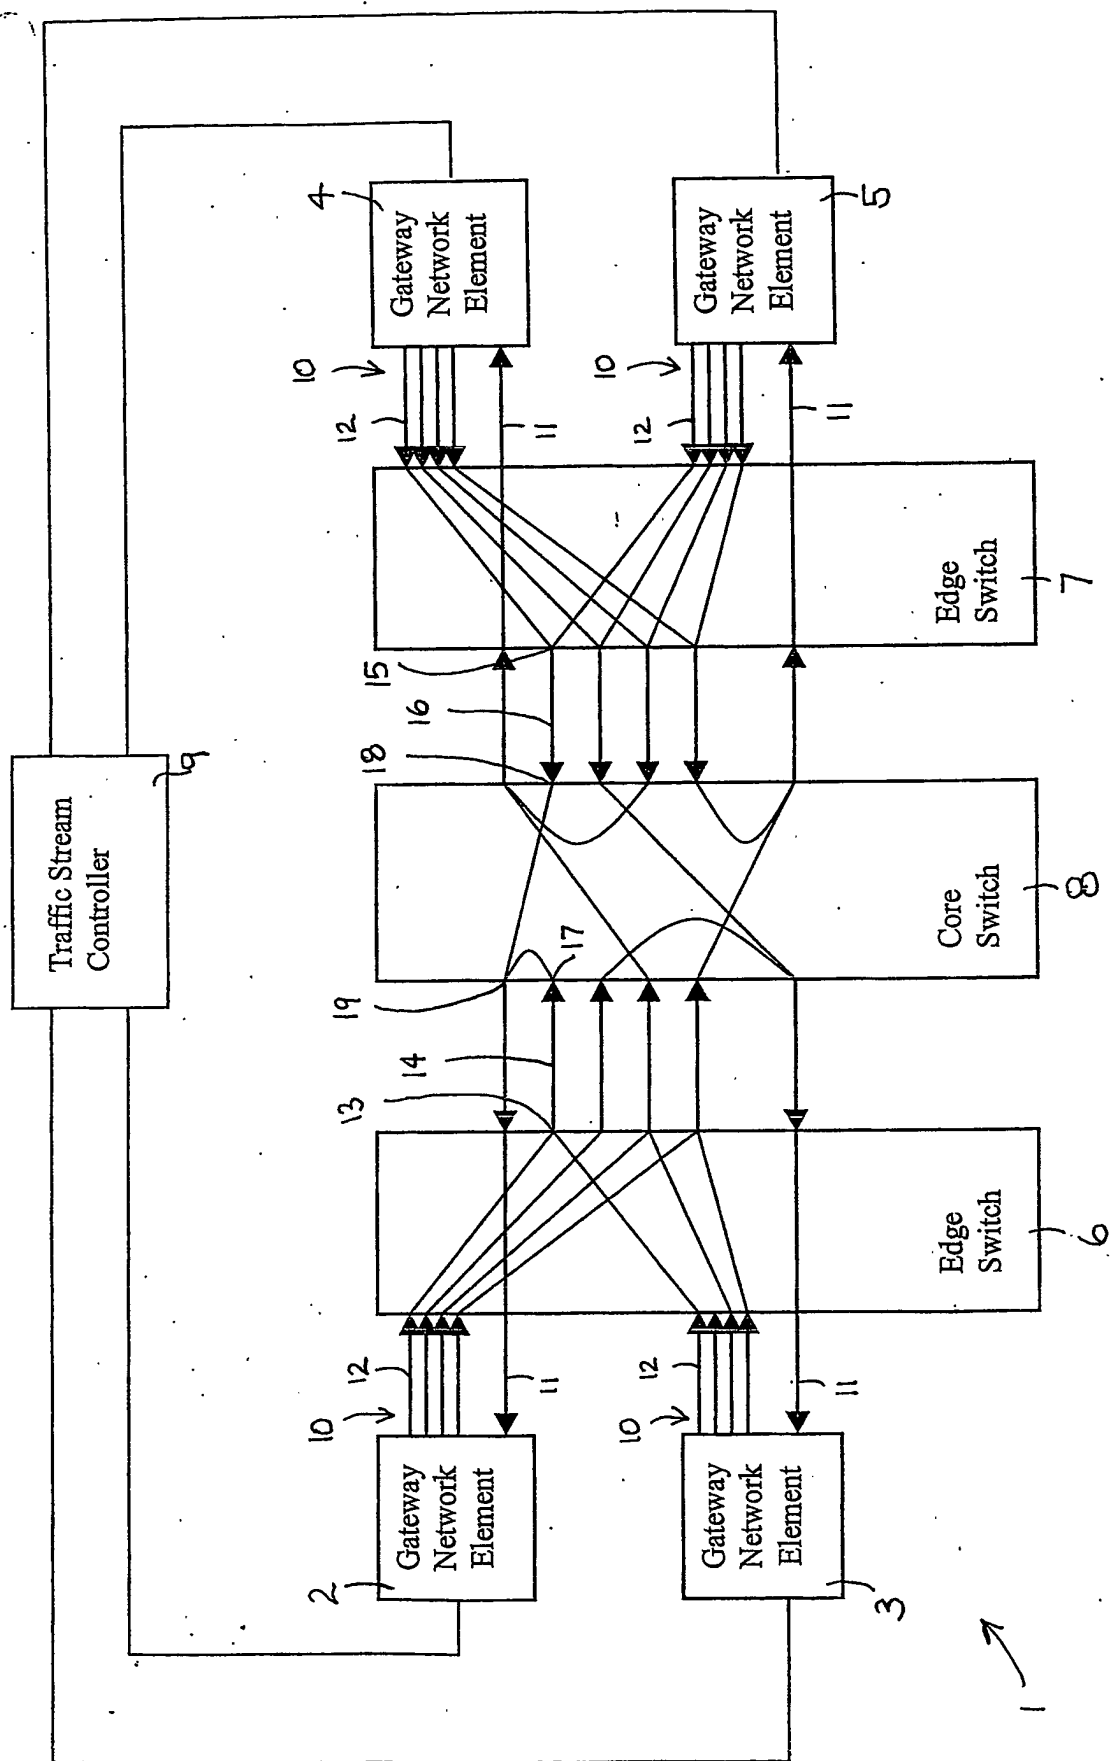

PCT/GB2004/001064





This Page is inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record

## BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLORED OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images  
problems checked, please do not report the  
problems to the IFW Image Problem Mailbox**